


Contemporary

TEXTURED FINISH

MAIBEC URBahn® BRUSHED-FACE FINISH

MAIBEC EM+® INSTALLATION SYSTEM

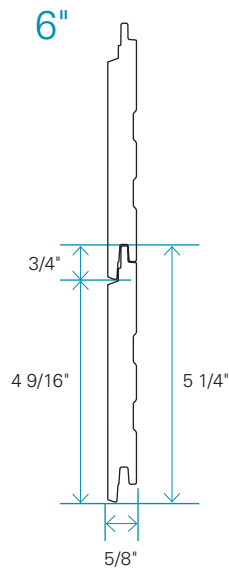

NOMINAL DIMENSION	INSTALLATION SYSTEM	FINISH	ACTUAL DIMENSIONS	EXPOSED SURFACE	OVERLAP	INSTALLATION
6"	Maibec em+®	Textured and Maibec URBahn® brushed-face	5/8" x 5 1/4"	4 9/16"	3/4"	Horizontally and vertically**

General Specifications

SPECIES

- Spruce - Fir (SPF) / Sound tight knot

MANUFACTURING

- Kiln-dried (KD) between 12% to 16% humidity

PACKAGING

- 4' to 16' random lengths in bundles

AVAILABLE COLOURS

Textured finish

- Maibec Natural tones

Maibec URBahn® brushed-face finish

- Maibec Natural tones

FACTORY-STAINING

- Siding is factory-coated on all six sides in a controlled environment for maximum stain absorption and retention. This also provides increased protection from the damaging effects of the sun and the elements.
- Low-volatile organic compounds (VOCs) water-based stains

For exterior use only.

* SEE THE CALCULATION METHOD UNDER THE SUPPORT TAB MAIBEC.COM

** THIS PROFILE CAN BE INSTALLED HORIZONTALLY, VERTICALLY OR DIAGONALLY. HOWEVER, VERTICAL AND DIAGONAL INSTALLATIONS MAY RESULT IN MORE VISIBLE STAPLES THAN A HORIZONTAL INSTALLATION.

Contemporary

Preparing the Wall for Installation

Siding must be installed over a standard maximum 16" on centre stud built wall with OSB (oriented strand board) sheathing or plywood, and an approved water-resistive barrier. The final step in preparing the wall for siding is to nail furring strips vertically into the studs according to all applicable building codes and the Maibec installation requirements. When used in combination with ventilation and drainage accessories, these

furring strips create a continuous air gap between the siding and the water-resistive barrier.

For details, see the Maibec em+® Siding Installation Guide at maibec.com under the SUPPORT tab.

Installation Systems

STAPLES **(FOR MAIBEC EM+® INSTALLATION SYSTEM)**

- The siding is fastened to the wall using 2", 7/16" crown, 16 gauge, resin-coated stainless steel SUS 304 staples. The list of recommended pneumatic staplers is available on our website at maibec.com under the SUPPORT tab.
- 3,000 staples (1 box) needed per 750 sq. ft. Order also 1 lb of 2" nails per 1,000 sq. ft. to nail the starter course, top of walls, top and bottom of windows, etc.

Recommended pneumatic staplers compatible with the Maibec em+® stapler guide:

- HITACHI™** (N5008 AC 1" and AC 2")
- MAKITA™** (AT1150A)
- SENCOTM** (SNS41) and discontinued models (SNS50XP, SNS45XP, SNS44XP)

** THE MENTIONED TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS.

Maibec strongly recommends using the Maibec em+® stapler guide* which simplifies and speeds up the installation of Maibec em+® siding.

* AVAILABLE THROUGH YOU MAIBEC RETAILER. DO NOT FORGET TO ADD IT TO YOUR SIDING ORDER.

Complementary accessories

VENTILATION AND DRAINAGE ACCESSORIES

Maibec ventilated strips feature a perforated 50% open pattern and adapt to all types of installations where ventilation and drainage are required. They also prevent rodents and certain insects from infiltrating behind the wall. Whether you're All our ventilated products comply with our installation requirements and will help to ensure the optimal performance of your Maibec products.

METAL CORNERS

With their sleek design, our inside and outside corners are the perfect finishing touch for the Maibec URBÄHN® Series. 10' lengths.

WARRANTY* – SIDING TEXTURED FACE



WARRANTY* – SIDING BRUSHED FACE / MAIBEC URBÄHN®



* SOME RESTRICTIONS APPLY. SEE DETAILED WARRANTIES.

© REGISTERED TRADEMARK PROPERTY OF MAIBEC INC. © COPYRIGHT - MAIBEC INC. FEBRUARY 2019 A1616298.1A