


Western Red Cedar Shingles

RESQUARED AND REBUTTED. NATURAL (KILN-DRIED) OR FACTORY-STAINED.

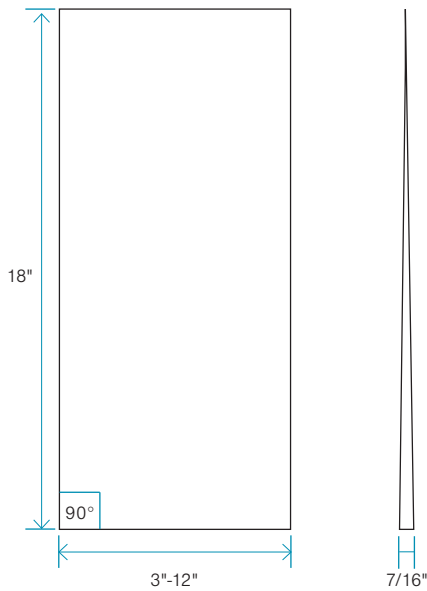

| STAIN | GRADE | BUTT THICKNESS | WIDTH | NOMINAL LENGTH | INSTALLATION |
|--|------------------------------------|----------------|---------|----------------|--------------|
| <ul style="list-style-type: none"> - Natural (unstained) - Solid stain - 2 coats - Semi-transparent Spice series - 2 coats - H2BO water-based bleaching stain - 1 coat | #1 R&R (resquared and rebutted) | 7/16** | 3"-12** | 18** | Sidewall use |
| <ul style="list-style-type: none"> - Natural (unstained) | #2 R&R (resquared and rebutted) | 7/16** | 3"-12** | 18** | Sidewall use |

► *Also available in 24" Natural Royal Shingles

General Specifications

SPECIES:

- Western Red Cedar – *Thuja plicata*

MANUFACTURING

- Kiln-dried to 5% moisture content

PACKAGING AND COVERAGE

- Full carton covers approximately 50 sq. ft. at 7" exposure
- Half carton covers approximately 25 sq. ft. at 7" exposure

AVAILABLE COLOURS

- Maibec solid stain colour chart
- Semi-transparent Spice series
- H2BO water-based bleaching stain
- Unlimited choice of solid colours thanks to our TrueMatch® system

AVAILABLE FINISHES

- Regular: Clean sawn faces
- Sanded: Sanded on one side (Sanded will impact butt thickness)
- Grooved: Machine grooved

FACTORY-STAINING

- Every shingle is factory-coated on all sides in a controlled environment for maximum stain absorption and retention. This also provides increased protection from the damaging effects of the sun and the elements.
- A primer is applied on light and medium shades to block tannins. Dark shades do not require any primer as tannins are not noticeable.
- Following the stain application, the shingles are sent through a state-of-the-art drier for curing. Developed using European technology, this drier cures the stain from the inside out. The shingles are then cooled down and packaged. This unique system increases the durability of the product once installed.
- Low-volatile organic compound (VOC) water-based stains.

For exterior use only.

* DIMENSIONS MAY VARY DUE TO KILN-DRYING.


Western Red Cedar Shingles

Installation

FASTENING 1" ABOVE THE BUTT LINE OF THE SUCCEEDING COURSE

For a 7" exposure, fasten the shingle 1" above the butt line of the succeeding course, resulting in a distance of 8" from the base of the shingle. This ensures compliance with the installation requirement.

See the Maibec Shingles installation guides for all installation requirements.

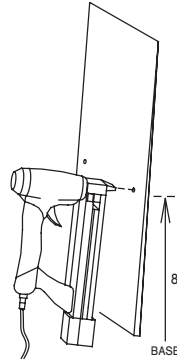

Installation System

STAPLES

- Stainless steel with minimum 7/16" and 3/4" maximum crown, minimum 16 gauge

NAILS

- Stainless steel or hot-dipped galvanized nails (do not use electrogalvanized)
- Ring shank blunt tip nail with minimum 7/32" head

How to Calculate

HOW TO CALCULATE THE AMOUNT OF SIDING NEEDED

Example – Area to cover: 1,000 sq. ft.

For 7" exposure, add 3% to the area to cover

$$1,000 \text{ sq. ft.} \times 1.03 = 1,030 \text{ sq. ft.}$$

$$1 \text{ box} = 50 \text{ sq. ft.}$$

$$1,030 \text{ sq. ft.} = 21 \text{ boxes}$$

Shingle Coverage Chart

| SHINGLE EXPOSURE | APPROX. SQ. FT. COVERAGE PER HALF CARTON | APPROX. SQ. FT. COVERAGE PER FULL CARTON |
|------------------|--|--|
| 5" | 18 | 36 |
| 5 1/2" | 19.5 | 39 |
| 6" | 21.5 | 43 |
| 6 1/2" | 23 | 46 |
| 7" | 25 | 50 |

WARRANTY* – SHINGLES WESTERN RED CEDAR SOLID STAIN



WARRANTY* – SHINGLES WESTERN RED CEDAR SPICE SERIES



WARRANTY* – SHINGLES WESTERN RED CEDAR H2BO

