


Western Red Cedar Shingles

RESQUARED AND REBUTTED. NATURAL (KILN-DRIED) OR FACTORY-STAINED.

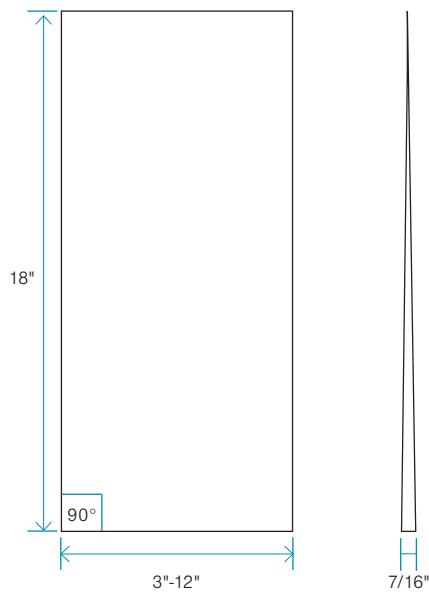

STAIN	GRADE	BUTT THICKNESS	WIDTH	NOMINAL LENGTH	INSTALLATION
<ul style="list-style-type: none"> - Natural (unstained) - Solid stain - 1 or 2 coats - Semi-transparent Spice series - 2 coats - Primed 1 coat (water and oil-based) - H2BO water-based bleaching stain - 1 coat 	#1 R&R (resquared and rebutted)	7/16**	3"-12**	18**	Sidewall use
<ul style="list-style-type: none"> - Natural (unstained) 	#2 R&R (resquared and rebutted)	7/16**	3"-12**	18**	Sidewall use

▶ Also available in 24" Natural Royal Shingles

General Specifications

SPECIES:

- Western Red Cedar – *Thuja plicata*

MANUFACTURING

- Kiln-dried to 5% moisture content

PACKAGING AND COVERAGE

- Full carton covers approximately 50 sq. ft. at 7" exposure
- Half carton covers approximately 25 sq. ft. at 7" exposure

AVAILABLE COLORS

- Maibec solid stain color chart
- Semi-transparent Spice series
- H2BO water-based bleaching stain
- Primed White/Gray (oil or water-based)
- Unlimited choice of solid colors thanks to our TrueMatch® system

AVAILABLE FINISHES

- Regular: Clean sawn faces
- Sanded: Sanded on one side (Sanded will impact butt thickness)
- Grooved: Machine grooved

FACTORY-STAINING

- Every shingle is factory-coated on all sides in a controlled environment for maximum stain absorption and retention. This also provides increased protection from the damaging effects of the sun and the elements.
- A primer is applied on light and medium shades to block tannins. Dark shades do not require any primer as tannins are not noticeable.
- Following the stain application, the shingles are sent through a state-of-the-art drier for curing. Developed using European technology, this drier cures the stain from the inside out. The shingles are then cooled down and packaged. This unique system increases the durability of the product once installed.
- Low-volatile organic compound (VOC) water-based stains.

* DIMENSIONS MAY VARY DUE TO KILN-DRYING.

For exterior use only.


Western Red Cedar Shingles

Installation

FASTENING 1" ABOVE THE BUTT LINE OF THE SUCCEEDING COURSE

For a 7" exposure, fasten the shingle 1" above the butt line of the succeeding course, resulting in a distance of 8" from the base of the shingle. This ensures compliance with the installation requirement.

See the Maibec Shingles installation guides for all installation requirements.

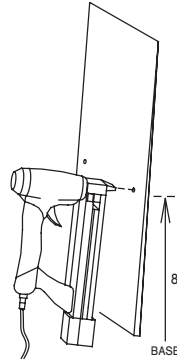

Installation System

STAPLES

- Stainless steel with minimum 7/16" crown, minimum 16 gauge

NAILS

- Stainless steel or hot-dipped galvanized nails (do not use electrogalvanized)
- Ring shank blunt tip nail with minimum 7/32" head

How to Calculate

HOW TO CALCULATE THE AMOUNT OF SIDING NEEDED

Example – Area to cover: 1,000 sq. ft.

For 7" exposure, add 3% to the area to cover

1,000 sq. ft. x 1.03 = 1,030 sq. ft.
 1 box = 50 sq. ft.
 1,030 sq. ft. = 21 boxes

Shingle Coverage Chart

SHINGLE EXPOSURE	APPROX. SQ. FT. COVERAGE PER HALF CARTON	APPROX. SQ. FT. COVERAGE PER FULL CARTON
5"	18	36
5 1/2"	19.5	39
6"	21.5	43
6 1/2"	23	46
7"	25	50

WARRANTY* – SHINGLES WESTERN RED CEDAR SOLID STAIN

30 YEARS against wood decay	20 YEARS on solid stain 2 COATS	10 YEARS on solid stain 1 COAT
5 YEARS on labor for wood decay	3 YEARS on labor on solid stain 2 COATS	2 YEARS on labor on solid stain 1 COAT

WARRANTY* – SHINGLES WESTERN RED CEDAR SPICE SERIES

30 YEARS against wood decay	3 YEARS on semi-transparent stain 2 COATS
5 YEARS on labor for wood decay	1 YEAR on labor on semi-transparent stain 2 COATS

WARRANTY* – SHINGLES WESTERN RED CEDAR H2BO

30 YEARS against wood decay
5 YEARS on labor for wood decay